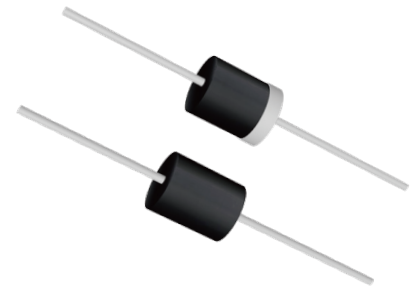


## FEATURES

- | Low zener impedance.
- | Excellent clamping capability.
- | JEDEC R-6/P-600 Molded Plastic.
- | Repetition rate (duty cycle): 0.01%.
- | Color band denoted cathode except bidirectional.
- | High temperature soldering: 260°C/10s at terminals.
- | Glass passivated chip junction in R-6/P600 package.
- | 3000W Peak Pulse power capability at 10×1000μs waveform.
- | Fast response time: typically less than 1.0ps from 0V to  $V_{BR}$  min.


**R6/P600**

**Schematic Symbol**

## APPROVALS

<b>RoHS</b>	Compliance with 2011/65/EU
<b>HF</b>	Compliance with IEC61249-2-21:2003

## ABSOLUTE MAXIMUM RATINGS ( $T_A=25^{\circ}\text{C}$ , RH=45%-75%, unless otherwise noted)

Parameter	Symbol	Value	Unit
Operating junction and storage temperature range	$T_J, T_{STG}$	-55 to +125	°C
Peak pulse power dissipation at 10/1000μs waveform	$P_{PP}$	3000	W
Steady state power dissipation at $T_L=75^{\circ}\text{C}$	$P_{M(AV)}$	6.5	
Peak pulse current of on 10/1000μs waveform	$I_{PP}$	See next table	A
Peak forward surge current, 8.3ms single half sine-wave for unidirectional only	$I_{FSM}$	300	A

**ELECTRICAL CHARACTERISTICS** ( $T_A=25^{\circ}\text{C}$ )

Part Number		$V_R$	$I_R@V_R$	$V_{BR}@I_T$		$I_T$	$V_C@I_{PP}$	$I_{PP}^{①}$
Uni-Polar	Bi-Polar	V	Max( $\mu\text{A}$ )	Min(V)	Max (V)	mA	V	A
3KP5.0A	3KP5.0CA	5.0	150	6.40	7.00	10	9.2	326.1
3KP6.0A	3KP6.0CA	6.0	100	6.67	7.37	10	10.3	291.3
3KP6.5A	3KP6.5CA	6.5	50	7.22	7.98	10	11.2	267.9
3KP7.0A	3KP7.0CA	7.0	20	7.78	8.60	10	12.0	250.0
3KP7.5A	3KP7.5CA	7.5	10	8.33	9.21	1	12.9	232.6
3KP8.0A	3KP8.0CA	8.0	10	8.89	9.83	1	13.6	220.6
3KP8.5A	3KP8.5CA	8.5	10	9.44	10.40	1	14.4	208.3
3KP9.0A	3KP9.0CA	9.0	10	10.00	11.10	1	15.4	194.8
3KP10A	3KP10CA	10.0	5	11.10	12.30	1	17.0	176.5
3KP12A	3KP12CA	12.0	2	13.30	14.70	1	19.9	150.8
3KP13A	3KP13CA	13.0	2	14.40	15.90	1	21.5	139.5
3KP14A	3KP14CA	14.0	1	15.60	17.20	1	23.2	129.3
3KP15A	3KP15CA	15.0	1	16.70	18.50	1	24.4	123.0
3KP16A	3KP16CA	16.0	1	17.80	19.70	1	26.0	115.4
3KP17A	3KP17CA	17.0	1	18.90	20.90	1	27.6	108.7
3KP18A	3KP18CA	18.0	1	20.00	22.10	1	29.2	102.7
3KP20A	3KP20CA	20.0	1	22.20	24.50	1	32.4	92.6
3KP24A	3KP24CA	24.0	1	26.70	29.50	1	38.9	77.1
3KP26A	3KP26CA	26.0	1	28.90	31.90	1	42.1	71.3
3KP28A	3KP28CA	28.0	1	31.10	34.40	1	45.4	66.1
3KP30A	3KP30CA	30.0	1	33.30	36.80	1	48.4	62.0
3KP33A	3KP33CA	33.0	1	36.70	40.60	1	53.3	56.3
3KP36A	3KP36CA	36.0	1	40.00	44.20	1	58.1	51.6
3KP40A	3KP40CA	40.0	1	44.40	49.10	1	64.5	46.5
3KP43A	3KP43CA	43.0	1	47.80	52.80	1	69.4	43.2

Part Number		$V_R$	$I_R@V_R$	$V_{BR}@I_T$		$I_T$	$V_C@I_{PP}$	$I_{PP}^{①}$
Uni-Polar	Bi-Polar	V	Max( $\mu$ A)	Min(V)	Max (V)	mA	V	A
3KP45A	3KP45CA	45.0	1	50.00	55.30	1	72.7	41.3
3KP48A	3KP48CA	48.0	1	53.30	58.90	1	77.4	38.8
3KP51A	3KP51CA	51	1	56.70	62.70	1	82.4	36.4
3KP54A	3KP54CA	54	1	60.00	66.30	1	87.1	34.4
3KP58A	3KP58CA	58	1	64.40	71.20	1	93.6	32.1
3KP60A	3KP60CA	60	1	66.70	73.70	1	96.8	31.0
3KP64A	3KP64CA	64	1	71.10	78.60	1	103.0	29.1
3KP70A	3KP70CA	70	1	77.80	86.00	1	113.0	26.5
3KP75A	3KP75CA	75	1	83.30	92.10	1	121.0	24.8
3KP78A	3KP78CA	78	1	86.70	95.80	1	126.0	23.8
3KP85A	3KP85CA	85	1	94.40	104.0	1	137.0	21.9
3KP90A	3KP90CA	90	1	100.0	111.0	1	146.0	20.5
3KP100A	3KP100CA	100	1	111.0	111.0	1	162.0	18.5
3KP120A	3KP120CA	120	1	133.0	135.0	1	193.0	15.5
3KP150A	3KP150CA	150	1	167.0	159.0	1	243.0	12.3
3KP160A	3KP160CA	160	1	178.0	185.0	1	259.0	11.6
3KP170A	3KP170CA	170	1	189.0	197.0	1	275.0	10.9
3KP180A	3KP180CA	180	1	201.0	209.0	1	292.0	10.3
3KP190A	3KP190CA	190	1	211.0	233.0	1	310.0	9.7
3KP200A	3KP200CA	200	1	224.0	247.0	1	329.2	9.3
3KP210A	3KP210CA	210	1	237.0	263.0	1	349.5	8.8
3KP220A	3KP220CA	220	1	246.0	272.0	1	371.1	8.4

Note:

 ①.Surge waveform:10/1000 $\mu$ s


 $V_R$ : Stand-off voltage -- Maximum voltage that can be applied

 $V_{BR}$ : Breakdown voltage


 $V_C$ : Clamping voltage -- Peak voltage measured across the suppressor at a specified  $I_{PP}$ 
 $I_R$ : Reverse leakage current

**RATINGS AND CHARACTERISTICS CURVES** ( $T_A=25^{\circ}\text{C}$ , unless otherwise noted)


**Figure 1: V- I curve characteristics (Uni-directional)**

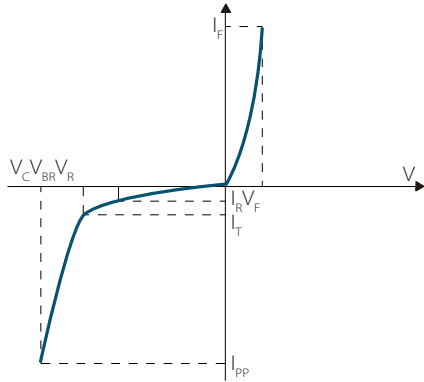


**Figure 2: V- I curve characteristics (Bi-directional)**

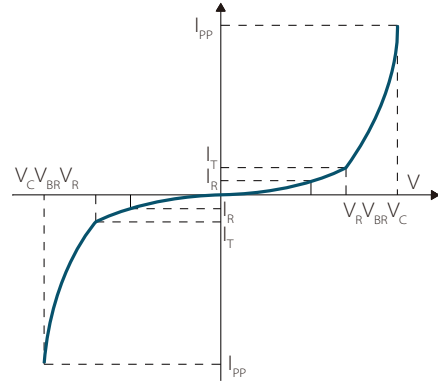

**Figure 3: Pulse waveform**

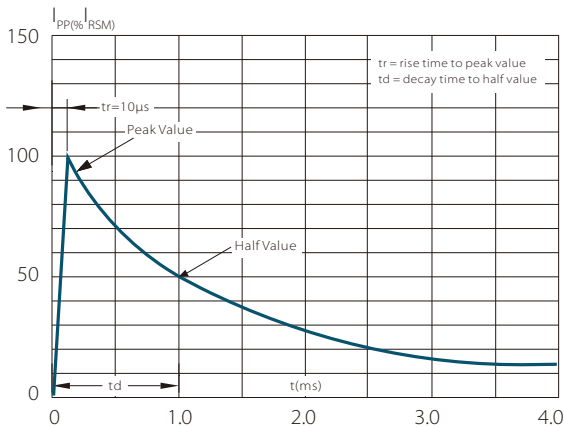


**Figure 4: Power derating curve**

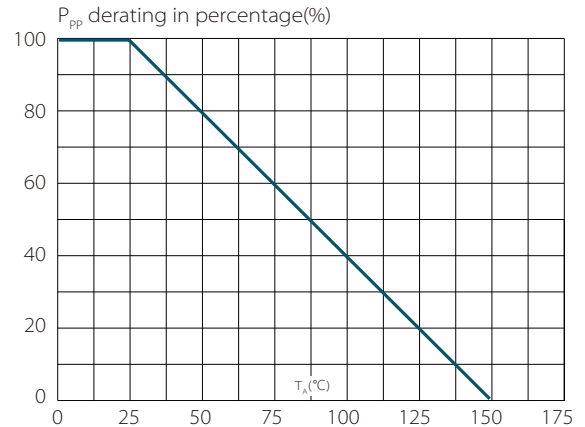


## SOLDERING PARAMETERS

Reflow Condition		Lead-free assembly
Pre Heat	Temperature Max ( $T_{s(min)}$ )	150°C
	Temperature Max ( $T_{s(max)}$ )	200°C
	Time (min to max) ( $t_2$ )	60 – 180 secs
Average ramp up rate (Liquidus Temp ( $T_L$ ) to peak)		3°C/second max
$T_{s(max)}$ to $T_L$ - Ramp-up Rate		3°C/second max
Reflow	Temperature ( $T_L$ ) (Liquidus)	217°C
	Time (min to max) ( $t_1$ )	60 – 150 seconds
Peak Temperature ( $T_p$ )		260(+0/-5)°C
Time within 5°C of actual peak Temperature ( $t_p$ )		20 – 40 seconds
Ramp-down Rate		6°C/second max
Time 25°C to peak Temperature ( $T_p$ )		8 minutes max.
Do not exceed		260°C

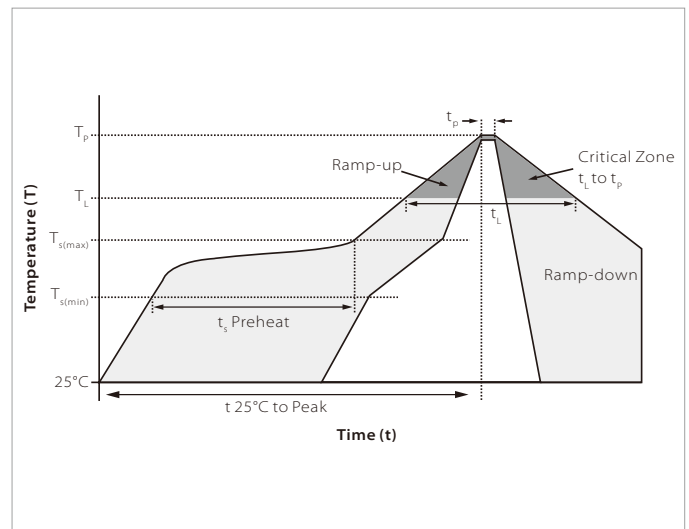

## PACKAGE INFORMATION

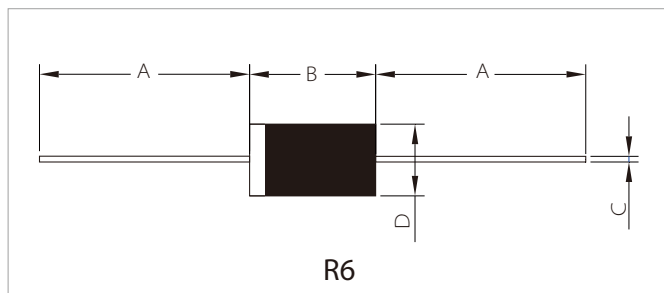

Ref.	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	25.40		1.000	
B	8.60	9.40	0.339	0.370
C	1.20	1.40	0.048	0.052
D	8.60	9.10	0.340	0.360

## ORDERING INFORMATION

Part Number	Case Type	Quantity	Packing Option
3KPxxA/CA	R6/P600	300	Box

To find your local partner within Semiwell's website : [www.semiwell.com.cn](http://www.semiwell.com.cn)

© 2023 Semiwell Microelectronics Co.,Ltd.

The content of this document has been carefully checked and understood. However, neither Semiwell nor its subsidiaries assume any liability whatsoever for any errors or inaccuracies of this document and the consequences thereof. Published specifications are subject to change without notice. Product suitability for any area of application must ultimately be determined by the customer. In all cases, products must never be operated outside their published specifications. Semiwell does not guarantee the availability of all published products. This disclaimer shall be governed by substantive Chinese law and resulting disputes shall be settled by the courts at the place of business of Semiwell. Latest publications and a complete disclaimer can be downloaded from the Semiwell website. All trademarks recognized.